

IN USE Warning Light Controller

Application


Fully integrated warning light operation directly from the disconnect panel along with two-level control of the room lighting using a foot-operated switch (included). Provides interface with imaging devices to operate the warning light that controls

Advantages

- Provides interface between Imaging System and "IN-USE" warning light(s) and room lighting (10 Amps max.)
- Proven components and designs eliminate guesswork
- Standard configurations suitable for use in 10kA short-circuit current rated (SCCR) power systems
- Standardized design and testing ensures high product quality and system reliability
- Includes installation and operation manual
- UL and cUL listed, labeled, and tested. Conforms to National Electric Code.
- Designed to be installed in space above drop ceiling or wall mounted
- Optionally provide 2-level lighting with remote footswitch control



- High SCCR ratings and a variety of custom configurations are available. Please contact us for consultation.

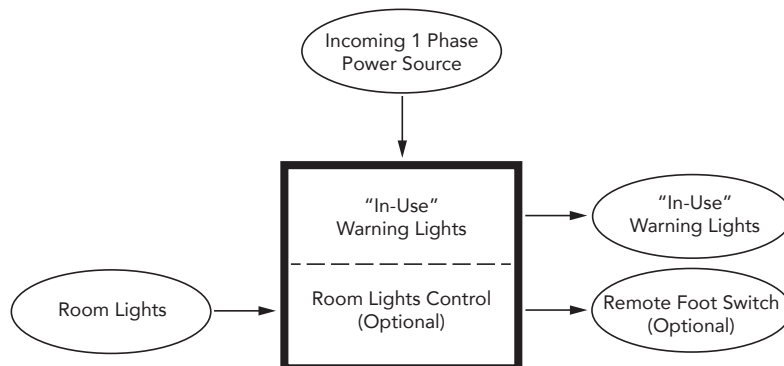

Ordering Information

BASIC PART NO.	VOLTAGE	AMPERAGE	NOMINAL DIMENSIONS		
			HEIGHT	WIDTH	DEPTH
RW120-10-BB	120 or 277, 50/60 Hz	10	12"	12"	6"
ROOM LIGHTING CONTROL OPTION -RL (Suffix)	DESCRIPTION Fully integrated Room Lighting operation with two-level control of the room lighting using a foot-operated switch (included).				

Listed above are common options and configurations. A wide variety of potential combinations of voltage, short-circuit current ratings, and amperage requirements can be accommodated.

Please **CONTACT US** with your specific needs.



©2018 Bevco Engineering Company, Inc.

W222N5739 Miller Way Sussex, WI 53089
www.bevcoisc.com | Tel: (262) 820-2400 | Fax: (262) 820-2599